


PRODUCT INFORMATION:

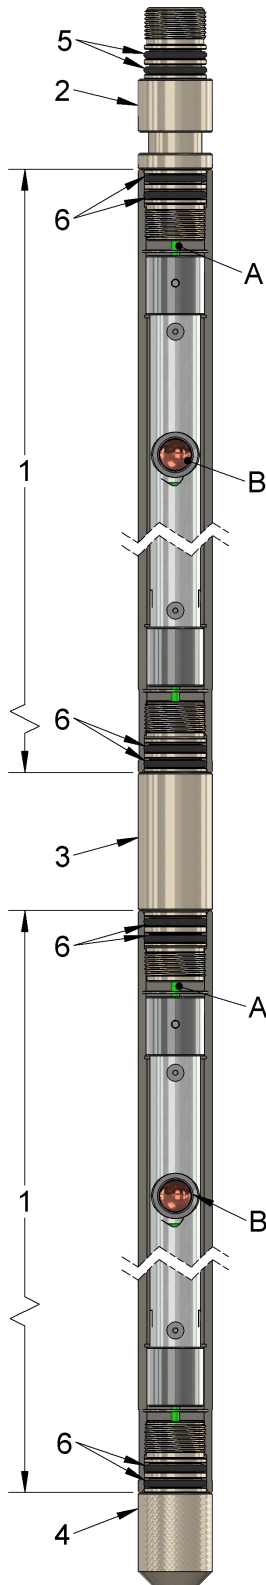

ITEM	PART NO.	DESCRIPTION
1	S21-0637-A02A	Shipping Assembly, 2" x 2', 6 spf, 60° (6 shots)
	S21-0637-A03A	Shipping Assembly, 2" x 3', 6 spf, 60° (12 shots)
	S21-0637-A04A	Shipping Assembly, 2" x 4', 6 spf, 60° (18 shots)
	S21-0637-A05A	Shipping Assembly, 2" x 5', 6 spf, 60° (24 shots)
	S21-0637-A07A	Shipping Assembly, 2" x 7', 6 spf, 60° (36 shots)
	S21-0637-A11A	Shipping Assembly, 2" x 11', 6 spf, 60° (60 shots)
	S21-0637-A15A	Shipping Assembly, 2" x 15', 6 spf, 60° (84 shots)
	S21-0637-A21A	Shipping Assembly, 2" x 21', 6 spf, 60° (120 shots)
2	TAG-2000-280	Top Sub, 2"
	TAG-2000-112	Top Sub, 2" Wireline Systems
3	TAG-2000-281	Tandem Sub, 2"
4	TAG-2000-078	Bull Plug, 2"
5	OOO-N569-215	O-Ring, #215, 90 Duro Nitrile
	OOO-V569-215	O-Ring, #215, 90 Duro Viton
6	OOO-N569-221	O-Ring, #221, 90 Duro Nitrile
	OOO-V569-221	O-Ring, #221, 90 Duro Viton
A	A538010	Detonating Cord, 40 gr/ft, RDX, LS, Ribbon
	A545010	Detonating Cord, 40 gr/ft, HMX LS, Ribbon
B	RTG-2125-302LS	Charge, RDX, DP, LS (Low Swell)
	RTG-2125-402LS	Charge, HMX, DP, LS (Low Swell)
	RTG-2125-402F	Charge, HMX, DP, BH
	SDP-2107-310	Charge, RDX, SDP, HERO®HR (Hard Rock)
	SDP-2107-410	Charge, HMX, SDP, HERO®HR (Hard Rock)

Note: Charges and ancillary components for higher temperatures are available by special order.

SPECIFICATIONS:

Carrier Pressure Rating	158.6 Mpa	23,000 psi
Carrier Temperature Rating	UP TO 260°C	UP TO 500°F
Carrier Tensile Strength	43 600 daN	98,000 lbf
Carrier Thread	1-11/16"-8 Stub Acme	
Carrier Torsional Yield	1 877 N•m	1,375 lb-ft
Gun Weight Loaded	7.13 kg/m	4.78 lb/ft
Max OD Before Firing	51.82mm	2.04 in.
Max OD After Firing (Fluid)	56.13mm	2.18 in.